



2-ツブ端子  
6.3x0.8

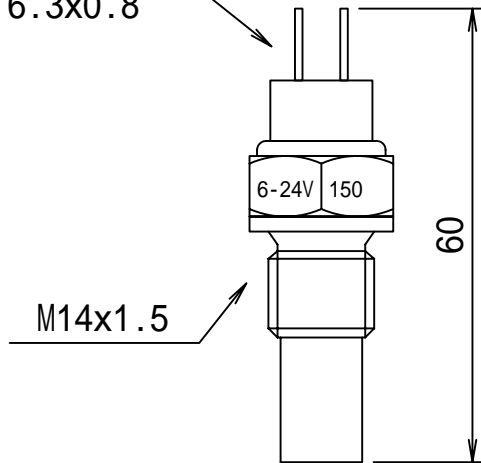

M14x1.5



特性カーブ

温度( )	抵抗( )	公差(%)	公差( )
40	481.53	12.51	60.26
45	392.57	12.36	48.51
50	322.17	12.17	39.20
55	266.19	11.97	31.87
60	221.17	11.77	26.02
65	184.72	11.60	21.42
70	155.29	11.36	17.64
75	131.38	11.00	14.45
80	112.08	10.48	11.75
85	96.40	10.00	9.64
90	82.96	9.68	8.03
95	71.44	9.32	6.66
100	61.92	8.87	5.49
105	54.01	8.45	4.56
110	47.24	8.07	3.81
115	41.42	7.73	3.20
120	36.51	7.32	2.67
125	32.38	7.36	2.38
130	28.81	7.41	2.13
135	25.70	7.76	1.99
140	23.00	8.09	1.86
145	20.66	8.36	1.73
150	18.59	8.66	1.61
155	16.74	8.85	1.48
160	15.11	9.04	1.37

レンジ ; 0 ~ 150

一般仕様

定格電圧 ; 6V ~ 24V

測定遅れ ; 電源投入後3分

使用温度 ; - 25 ~ + 120

測温素子 ; サミタ

重 量 ; 40g

WORK . NO.	APPROVED <i>SM</i>	 <b>クリエ電機株式会社</b> CREATE ELECTRIC CO., LTD SAGAMIHARA JAPAN	TITLE <b>温度センサ 2線式</b>	
DATE 15.FEB.2008	CHECKED 西川		DWG . NO. <b>323-805-003-001</b>	REV △
	DESIGNED 阿部			